




COLD ROLLED REBAR MS-60

NMX-B-072

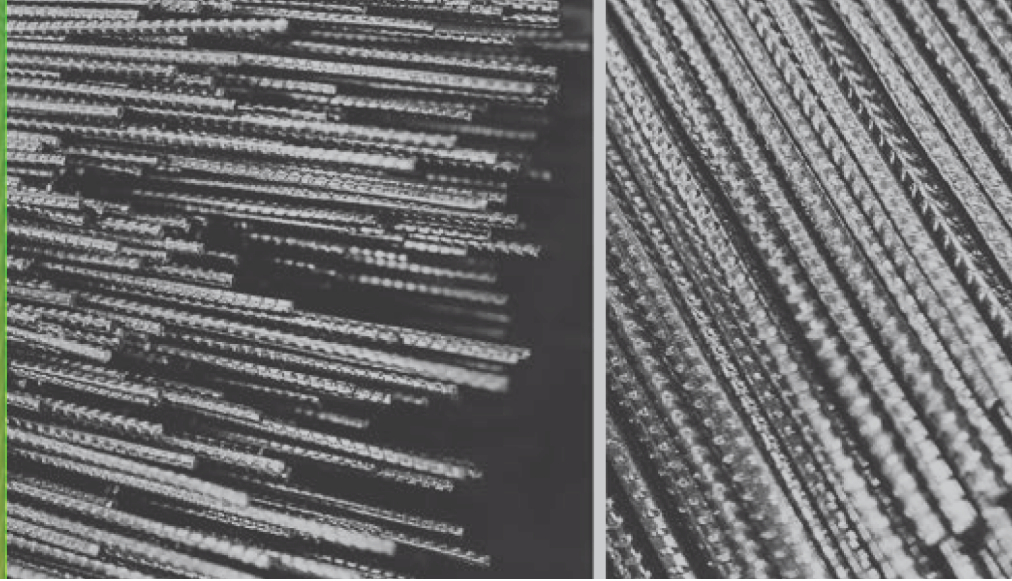

The Cold-Drawn Rebar MS-60 is highly resistant to stress, by its manufacturing process of cold rolling.

With this rebar you save up to 30% of the steel used in construction; compared to traditional hot rolled rebar.

► Specifications

Size	Grade	Presentation
5/32"	60	Length 6m and 12m. (Availability to make other lengths)
3/16"		
1/4"		
5/16"		

These products earn the following LEED® credits thanks to regional, recycled material content



LEED® v4
Prerequisite MRp:
Construction and demolition waste management planning.

- **Credit M12:** Construction Waste Management.
- **Building Product disclosure:**
 - Material ingredients
 - Sourcing of raw materials

- **MCR2:** Construction Waste Management.
- **MRc4:** Recycled Content.
- **MRc5:** Re-regional Materials.