




WELDED REINFORCED CAGE

NMX-B-455, NMX-B-253,
NMX-B-072

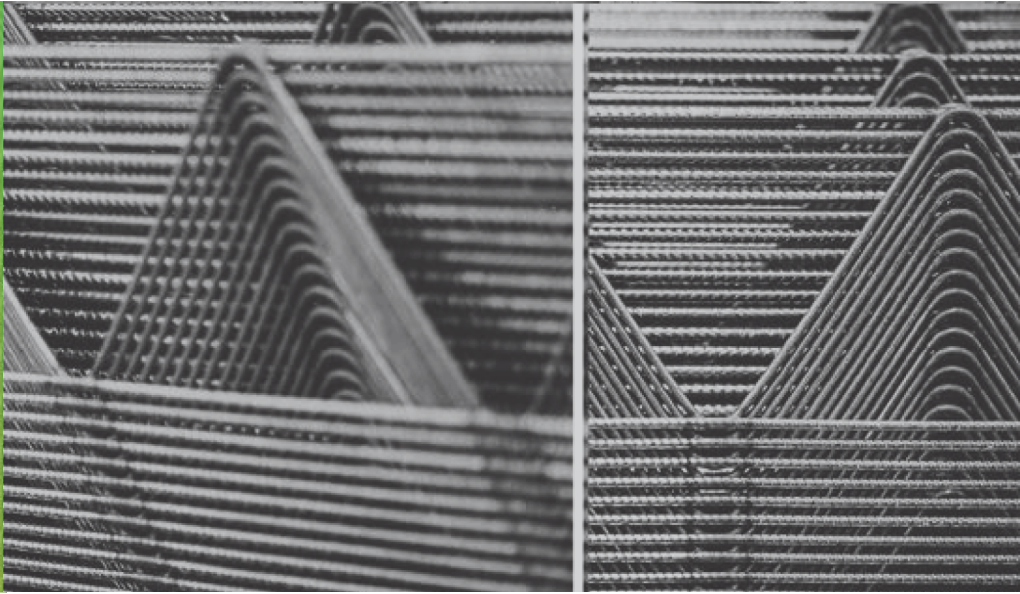

Is a electro welded product used to fabrication of pre fabricated beams of concrete consist on three rebars forming a triangular section ensambled with stirrups.

► Especifications

Size	Height (cm)	Area (mm ²)	Upper Diameter	Lower Diameter	Zig- Zag	Presentation
			Diameter inches (mm)	Diameter inches (mm)	Diameter (mm)	
10-36	10	36	1/4" (6.35)	3/16" (4.76)	4.11	Lenght 6.0 a 9.0 m (Available for other lenght)
12-36	12	36	1/4" (6.35)	3/16" (4.76)	4.11	
14-36	14	36	1/4" (6.35)	3/16" (4.76)	4.11	
19-36	19	36	1/4" (6.35)	3/16" (4.76)	4.11	
10-64	10	64	1/4" (6.35)	1/4" (6.35)	4.11	
12-64	12	64	1/4" (6.35)	1/4" (6.35)	4.11	
14-64	14	64	1/4" (6.35)	1/4" (6.35)	4.11	
19-64	19	64	1/4" (6.35)	1/4" (6.35)	4.11	
21-64	21	64	1/4" (6.35)	1/4" (6.35)	4.11	
14-99	14	99	5/16" (7.93)	5/16" (7.93)	4.11	
19-99	19	99	5/16" (7.93)	5/16" (7.93)	4.11	
21-99	21	99	5/16" (7.93)	5/16" (7.93)	4.11	
24-99	24	99	5/16" (7.93)	5/16" (7.93)	4.11	

These products earn the following LEED® credits thanks to regional, recycled material content



LEED® v4
Prerequisite MRp:
Construction and demolition waste management planning.

- **Credit M12:**Construction Waste Management.
- **Building Product disclosure:**
 - Material ingredients
 - Sourcing of raw materials

- **MCR2:** Construction Waste Management.
- **MRC4:** Recycled Content.
- **MRC5:** Reegional Materials.